


## DESCRIPTION:

- ° **Connectionlock** is a simple and effective system to protect the pipe- fittings of meters.
- ° The transparent plastic allows visual control of integrity of the fitting itself.
- ° **Connectionlock** works like a seal because it consists in two parts fitting permanently one into the other
- ° There is no way to remove Connectionlock without breaking it.
- ° Once positioned on the pipe-fitting, it is possible to ensure it with a consequentially numbered wire seal. (TWISTSEAL)
- ° **By this way maximum security is achieved.**

## SIZES:

- ° **ART 311** : L:26mm R1: 16mm R2: 22mm  
Fit to DN20 (3/4") meters
- ° **ART 312** : L:30mm R1: 16mm R2: 24,5mm  
Fit to DN20 (3/4") bold fittings
- ° **ART 313** : L:28mm R1: 19mm R2: 27mm  
Fit to DN25 (1") meters
- ° **ART 314** : L:38mm R1: 29mm R2: 39mm  
Fit to DN40 (1½") meters

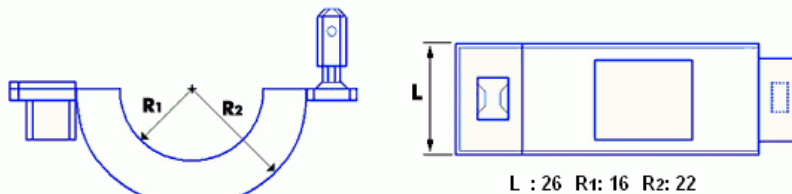

## MATERIAL:

- ° Polycarbonate (PC)

## SEQUENTIAL NUMBERING AND CUSTOMISATION:

- ° INK JET PRINT
- ° Sequenced numbering up to 6 digits. (NOT NECESSARY)
- ° Customised up to 20 characters on one line
- ° Logos available upon request.

- ° For special orders, logo printing in relief.

## PACKING:

### Art: 311

Carton with 500 seals  
Carton dimensions: 40x60x35 cm  
Carton weight: 13 kgs

### Art: 312

Carton with 500 seals  
Carton dimensions: 40x60x38 cm  
Carton weight: 13 kgs

### Art: 313

Carton with 500 seals  
Carton dimensions: 40x60x35 cm  
Carton weight: 14 kgs

### Art: 314

Carton with 250 seals  
Carton dimensions: 40x60x35 cm  
Carton weight: 9 kgs

AVAILABLE COLOURS				
				
AVAILABLE TRANSPARENT COLOURS				
				