

DESCRIPTION:

° LH 16 – Pneumatic sealing gun suitable for the application of steel, inox eyelet seals 13.mm diam. (our product art. 114/Inox).


°The pneumatic operation is carried out with air pressure between 6 and 8 atm.

°The seals are loaded in the rear barrel (A) and position themselves automatically along the shoot.

° The sealing gun is operated by one button (B) which triggers the sealing action.

The button has to be pushed and held until the seal is correctly applied. (approx 1 second per application).

BARREL HOLDING CAPACITY:
approx. 200-300 seals each time

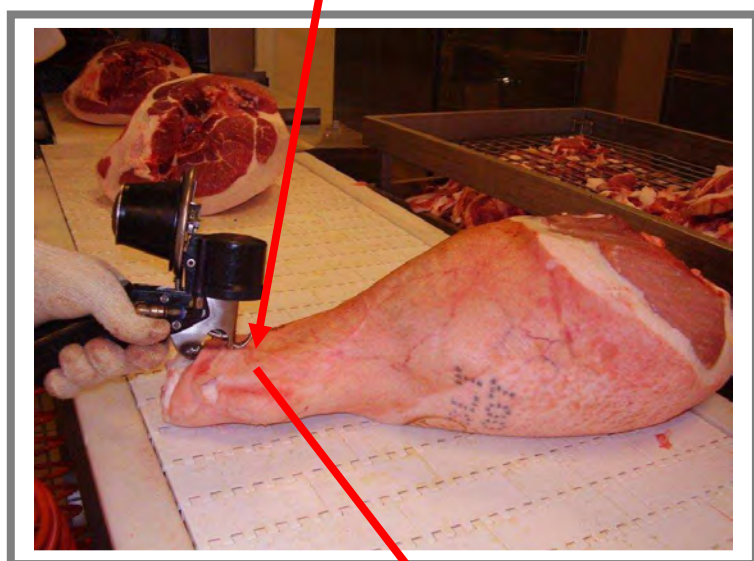

SECURITY SEALS FOR INDUSTRIES AND TRANSPORTS - TAMPERING PREVENTION SYSTEMS